NOTE
DIMENSIONS SHOWNWITHOUT ALLOWANCE
ARE NOMINAL AND ARE SUBJECT TO PRODUCTION TOLERANCE.

SPECIFICATIONS

Type		Air-Cooled 4Stroke,OHV Gasoline Engine with Slant Cylinder
Number of Cylinder -Bore X stroke	(mm)	1-80 X 59
Displacement	(cm^3)	296
Continuous Rated Output	kw/rpm (PS/rpm)	5.5/1800 (7.5/1800)
Maximum Output	kw (PS)	7.3 (10.0)
Maximum Torque	N.m/rpm (kgf·m/rpm)	38.6/1400 (3.94/1400)
PTO Shaft Rotation	facing PTO	Counter-Clockwise
Fuel		Unleaded Automobile Gasoline
Fuel Tank Capacity	(L)	6.0
Lubricating Oil		Engine Oil SE Class or Higher
Lubricating Oil Capacity	(L)	1.0
Carburetor		Float , Butterfly valve · Sideways suction Type
Ignition system		Breaker less Ignition Type, Flywheel Magneto
Spark Plug		NGK-BPR6HS equivalent(E6RTC)
Starting System		Recoil Starter
Governor System		All Speed Mechanical Governor
Lubricating System		Compulsive Splash Type
Air Cleaner		Polyurethane Type

DIAGRAM

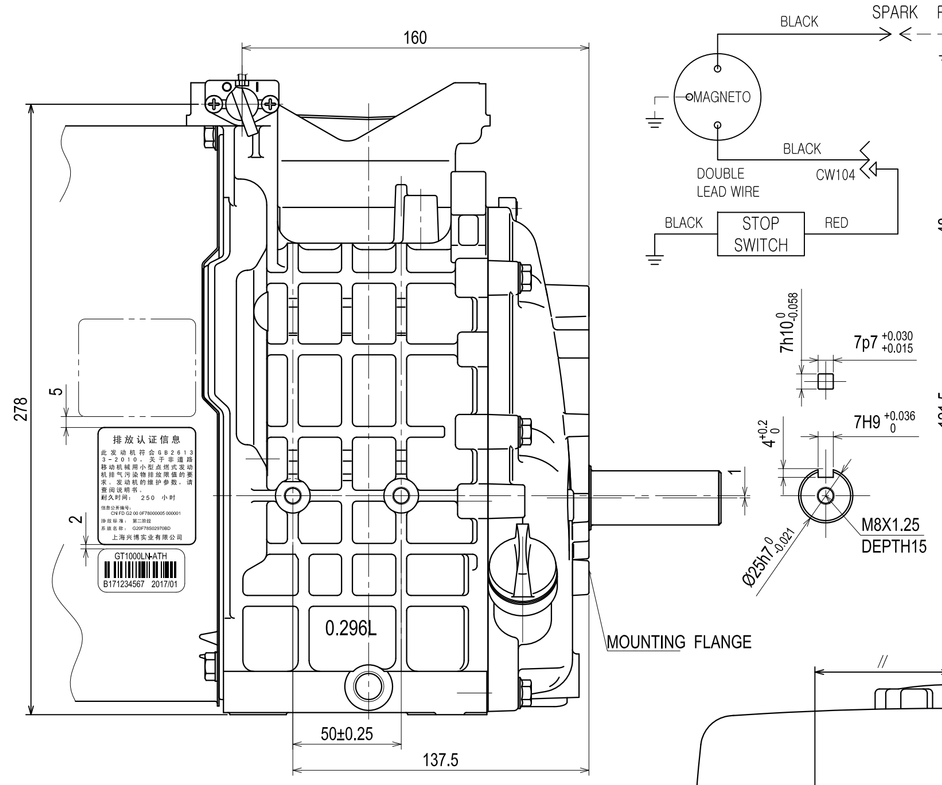

VIEW Z

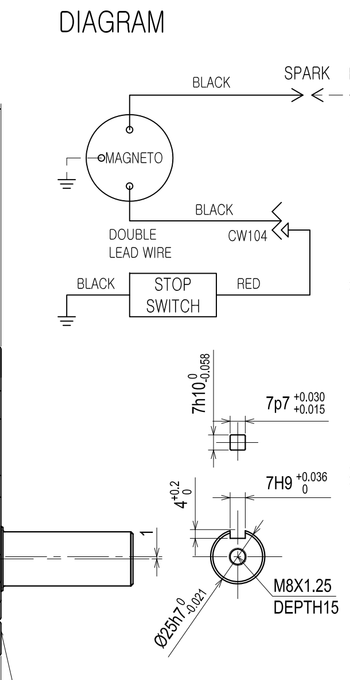

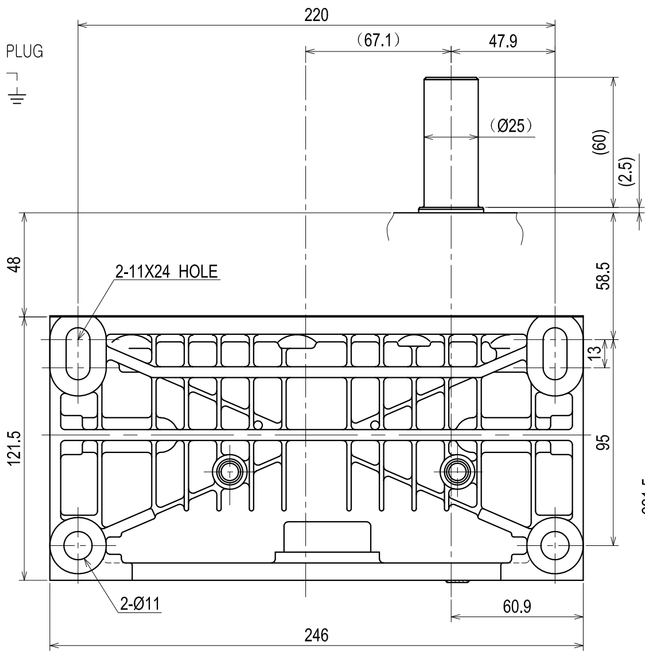

VIEW P

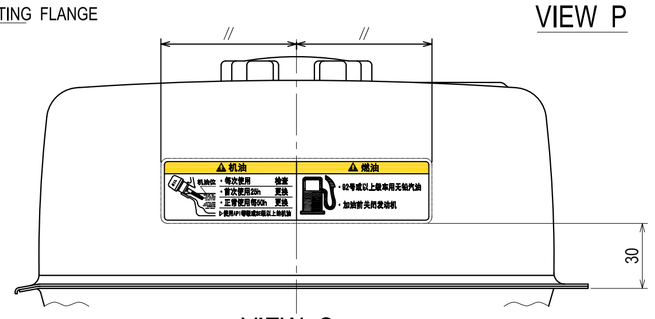

VIEW Q

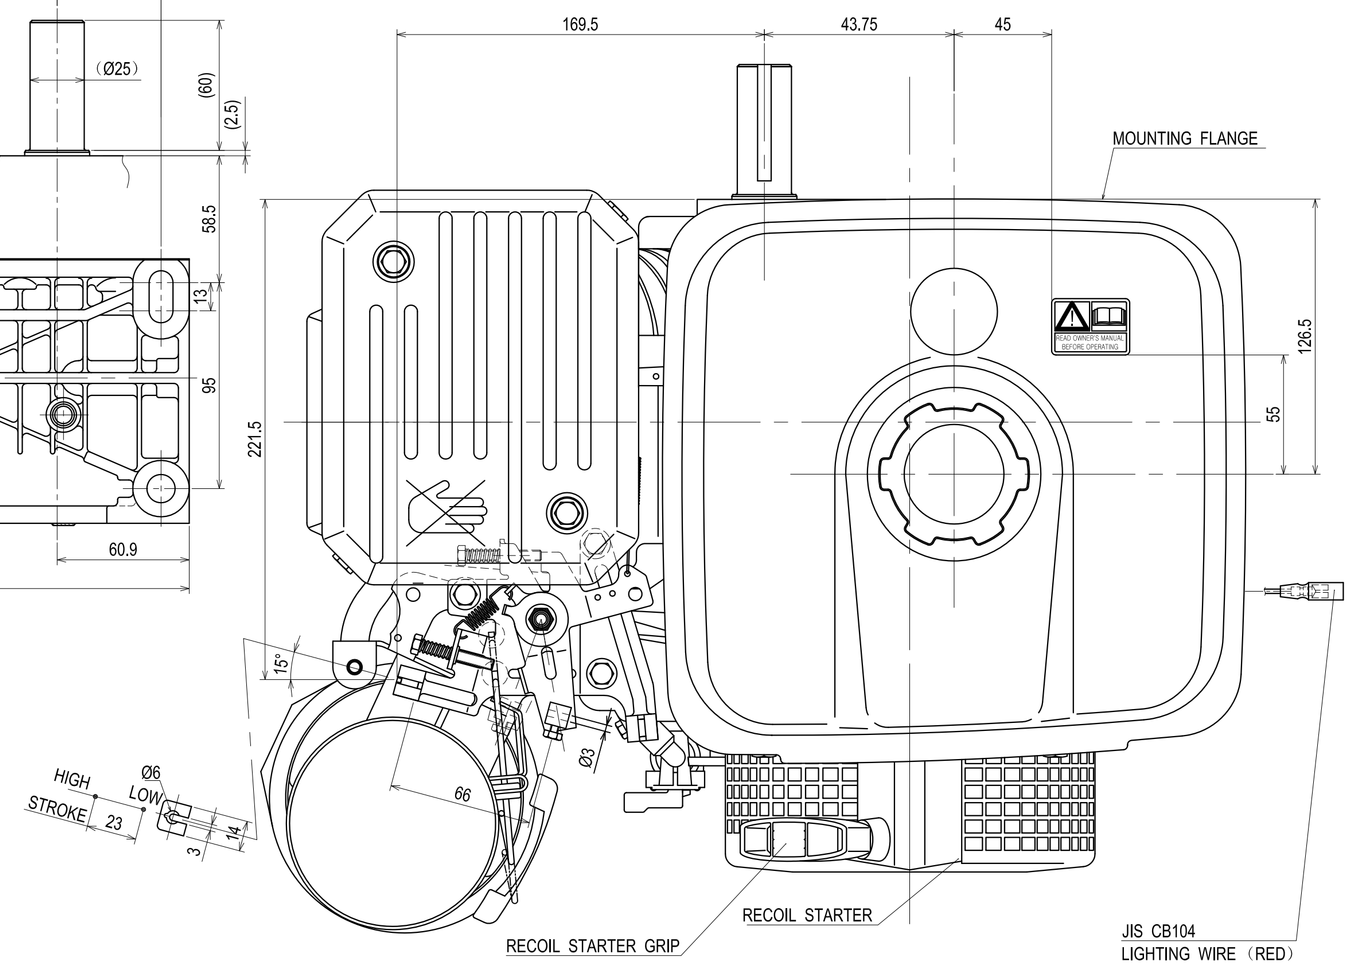

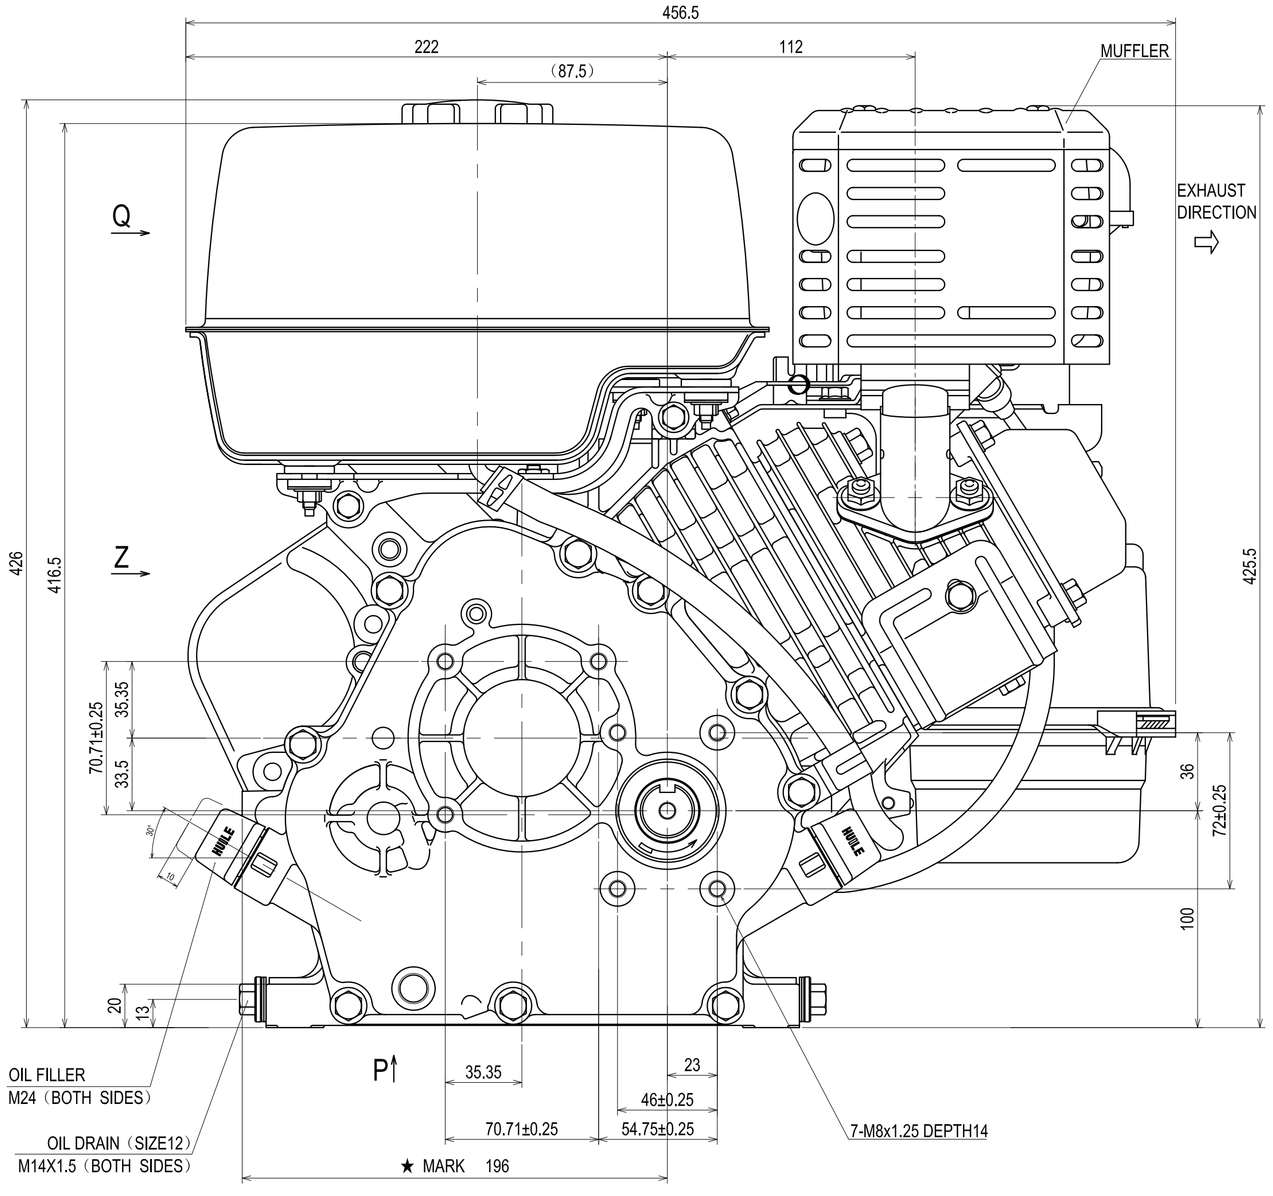

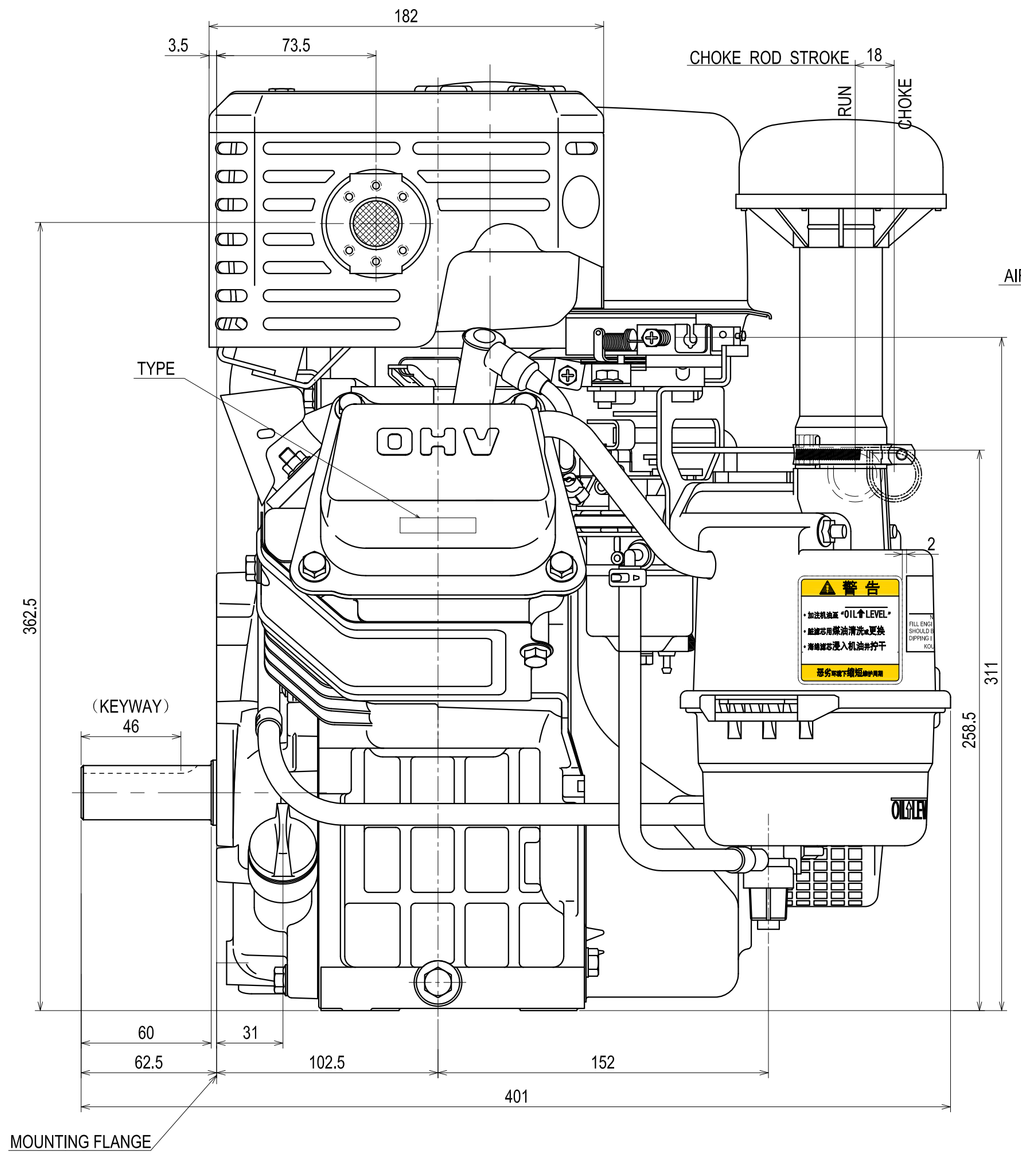

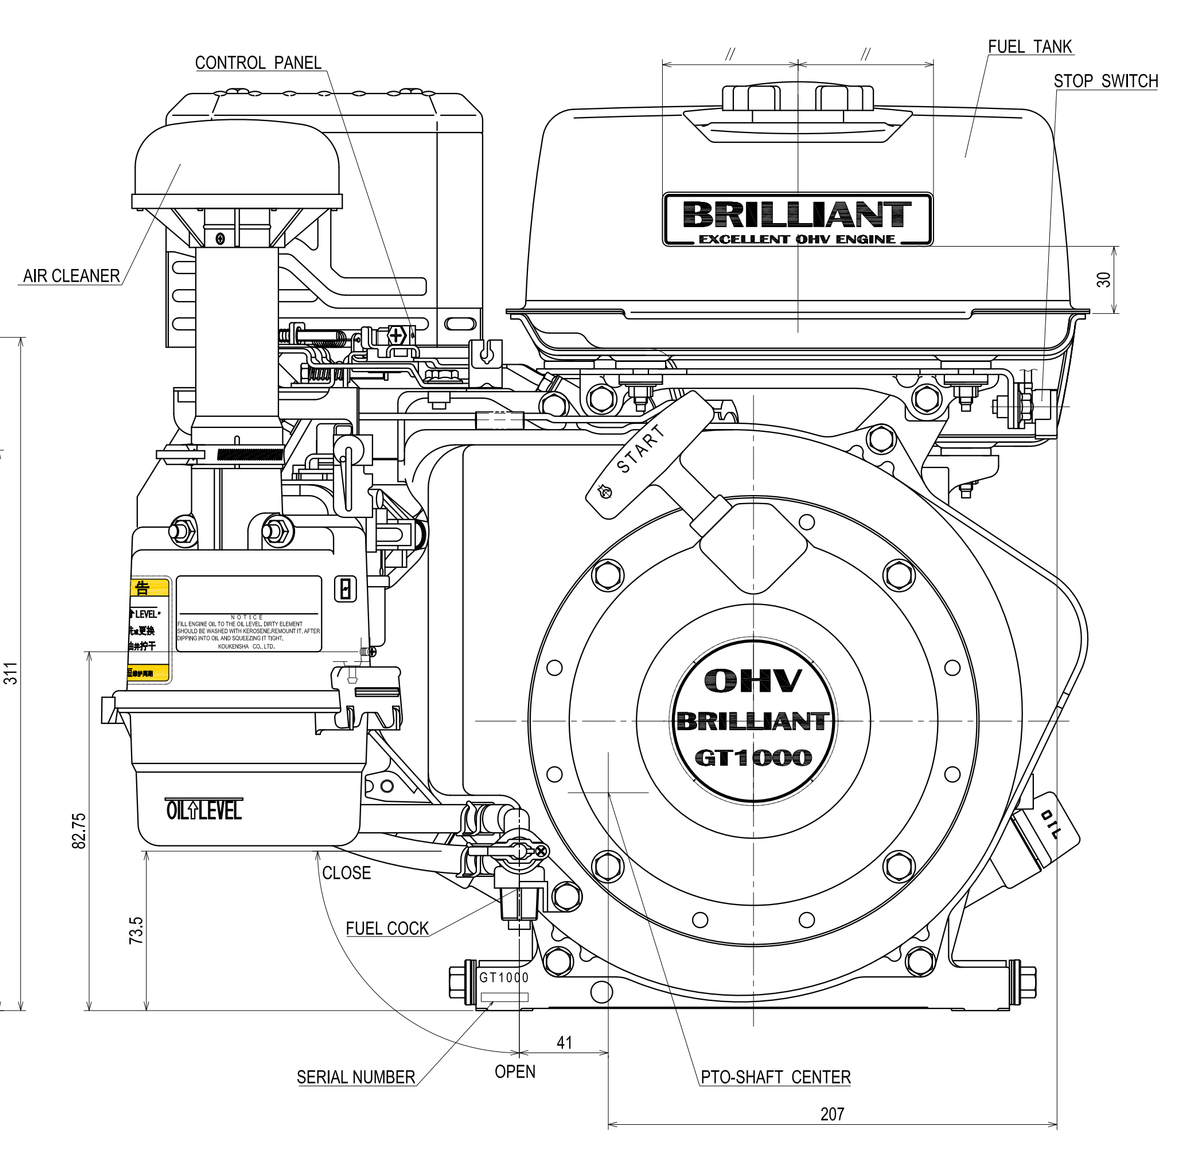

		认可	检图 制图
形式	GT1000	比例 1:2	B/M
名称	ENGINE, INSTALLATION	机型	GT1000LN-ATHZ

博联集团 上海兴博实业有限公司

A1